RELYENCEPSTRIBUTOR



4" AND 6" DISK LIGHT – J-BOX OR RETROFIT MOUNTING


Туре	
Project	
Catalog No.	



DIMENSIONS: 5-7/8"Ø x 1"H / 7-3/8"Ø x 1-1/2"H

Outlet box mounting

Retrofit Mounting

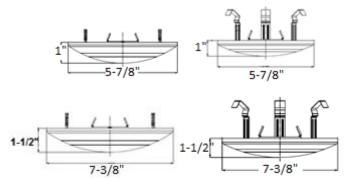

SPECIFICATIONS					
Model	RE-GEO-FM	RE-GEO-FM-991XX			
Description	Disk Light -	Disk Light – 4" and 6"			
Input Voltage	120 VAC	120 VAC			
Size	4"	6"			
Wattage	8W	10W			
Lumens	650 lm	750 lm			
Efficacy	81 lm/W	75 lm/W			
	2700K@90C	RI			
CCT/CRI	3000K@80C	RI			
	3500K@80C	RI			
Power Factor	>0.95	>0.95			
▼ Operating Temperature	-4 to +113 °F	-4 to +113 °F			
Dimming	Triac Dimmi	Triac Dimming and CFL/LED			
Dimensions	See Diagram	See Diagram			
Environment	Indoor – Dry	Indoor – Dry / Damp			
	c us	ENERGY SIAR COMPILANT			
Warranty		5 Years – see published warranty terms for detailed information.			

▼Exceeding the operating temperature values may damage the LEDs by reducing the lifespan, lumen output, and/or adversely impact color consistency. Improper thermal management may lead to premature product failure and void the warranty.

DESCRIPTION

JESCO's RELYENCE Series LED Disk light is available in a domed die-cast configuration providing an easy and cost effective solution to the traditional flush mounted ceiling light. Easily mounts on to standard junction boxes or retrofits into 4" and 6" recessed housings with supplied mounting kit. These fixtures are designed for damp or dry locations and are dimmable down to 10% with Triac or CFL/LED dimmers.

FEATURES

- Up to 750 lm from 10 W
- CCT 2700K, 3000K or 3500K◆
- CRI >80 & 90◆
- Power Factor >0.95
- Dimmable down to 10% with most Triac or CFL/LED dimmers
- ◆Refer to ordering info

- ADA compliant
- Beam Angle 115°
- Damp Location Listed
- Eco-Friendly No mercury or hazardous materials
- J-Box or retrofit mounting



RELYENCEPROGRAM




Туре	
Project	
Catalog No.	

ORDERING INFORMATION

MODEL	STYLE		CCT/CRI		FINISH
RE-GEO-FM-991		-		-	
	04- 5-7/8"		2790-2700CCT/90CRI		WH-White
	06- 7-3/8"		3080-3000CCT/80CRI		
			3580-3500CCT/80CRI		


Example: RE-GEO-FM-99104-2790-WH


SUPPLIED WITH:



PHOTOMETRIC DATA

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



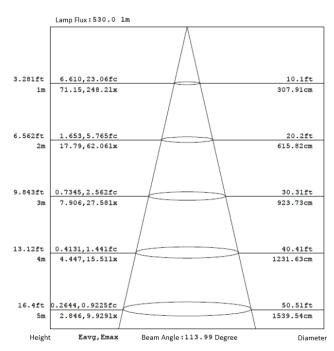

For 99104"



www.jescolighting.com support@jescolighting.com **Tech Support:** 855.592.0029 15 Harbor Park Drive Port Washington, NY 11050 **Main Line:** 800.527.7796 **Fax Line:** 855.265.5768 219 South 6th Ave City of Industry, CA 91746 **Main Line:** 855.654.0110 **Fax Line:** 626.333.2955


1/12/2017


RELYENCEPROGRAM

4	RE-GEO-FM-991XX
	LED FIXTURES 4" AND 6" DISK LIGHT – J-BOX OR RETROFIT MOUNTING

Type Project Catalog No.

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM





For 99106"

